

응용 자료

Determination of Pharmaceuticals in Environmental Samples

Waters Corporation



Abstract

This application note describes the use of two LC-MS methods for the examination of pharmaceuticals in environmental samples (concentrated sewage, surface water and drinking water). These analyses were

performed utilizing an XBridge C₁₈ HPLC column for the chromatographic separations

Introduction

The full effects of pharmaceutical substances in the environment are largely unknown however the risk is significant enough that many new studies are being initiated by such organizations as the U.S. Environmental Protection Agency and the World Health Organization in order to better understand the fate of these chemicals.

Worldwide, thousands of tons of active pharmaceutical substances are utilized in preserving human and animal health but very little is known about the ultimate fate of these drugs. A large portion of each dose can be excreted and unused medicine is often disposed of via sewer systems. Recent studies have indicated that a significant portion of urban sewage contains drug compounds that many pharmaceuticals are not completely eliminated in sewage treatment plants.

Additional sources of drugs in the environment include agricultural runoff (veterinary drugs excreted by domesticated animals) and landfill leachate (discarded drugs from households). The effects of the drugs and their metabolites on aquatic environments and organisms are largely unknown, as are the potential impacts on human health. They are, however, likely to have some impact and their presence is growing more common, thus additional research in this area is warranted.

This report will describe the use of two LC-MS methods for the examination of pharmaceuticals in environmental samples (concentrated sewage, surface water and drinking water). These analyses were performed utilizing an XBridge C₁₈ HPLC column for the chromatographic separations

Experimental

Samples

The analyses included standard solutions of pharmaceuticals as well as environmental samples (concentrated sewage, surface water and drinking water samples). Fourteen pharmaceuticals (and four internal standards) were analyzed (Table 1) using two LC.

		Retention Time (min)	Ionization (ESI)	Precursor Ion (m/z)	Product Ion (m/z)
Ciprofloxacin	Antibiotic	9.8	Negative	331.9	287.9
Norfloxacin	Antibiotic	9.7	Negative	319.8	275.9
Ofloxacin	Antibiotic	9.7	Negative	361.8	317.9
Carbamazepine	Antiepileptic	13.4	Negative	237.0	193.9
Acebutolol	Beta blocker	10.5	Negative	336.8	116.0
Atenolol	Beta blocker	3.4	Negative	267.0	144.9
Metoprolol	Beta blocker	10.7	Negative	267.9	190.9
Sotalol	Beta blocker	3.1	Negative	254.8	132.9
Clofibric acid	Drug metabolite	8.9	Negative	212.9	126.9
Enrofloxacin (IS)	IS for the antibiotics	10.3	Negative	359.9	315.9
Dihydrocarbamazepine (IS)	IS for carbamazepine	13.5	Negative	239.0	193.9
Alprenolol (IS)	IS for the beta blockers	12.8	Negative	249.9	172.9
Diclofenac	Anti-inflammatory	11.5	Positive	293.8	249.9
Ibuprofen	Anti-inflammatory	10.8	Positive	205.1	161.0
Ketoprofen	Anti-inflammatory	10.0	Positive	253.0	209.0
Naproxen	Anti-inflammatory	9.5	Positive	229.0	169.9
Bezafibrate	Lipid regulator	10.6	Positive	360.0	273.9
Fenoprop (IS)	IS for the anti-inflammatory, bezafibrate and clofibric acid	10.5	Positive	266.8	194.8

IS = internal standard

Table 1. The analyzed compounds, their retention times and MS parameters.

Sewage samples (influent and effluent) were obtained as composite samples over 24 hours and stored at -18 °C. River water samples were collected as grab samples, obtained using glass bottles and stored at 4 °C.

Sample Preparation

Solid-phase extraction was used to separate the pharmaceuticals from the water component of the sample.

The samples were filtered through 0.45 µm filters which were pre-washed with hexane, acetone, methanol and water. The pH of the samples was adjusted to 2.0 using concentrated HCL. Oasis MCX 3 cc (60 mg – Part Number 186000253) was used as the solid-phase adsorbent.

The adsorbent was pre-conditioned with 2 mL of hexane, 2 mL of acetone and 10 mL of methanol and 10 mL of non-contaminated groundwater (pH adjusted to 2.0). The samples were added to the cartridges at a flow rate of 8 mL/min. The cartridges were dried with nitrogen for 1 hour and the pharmaceuticals eluted using 4 x 1 mL of acetone. The extracts were then evaporated to 100 µL with nitrogen and 100 µL of methanol was added. Evaporation continued until the volume was 50 µL. 450 µL of ammonium hydroxide was added and the extracts stored at -18 °C.

HPLC/MS Conditions	
Column:	XBridge C ₁₈ , 2.1 x 50mm, 5 µm
Part Number:	186003108
Flow Rate:	0.2 mL/min
Injection Volume:	20 µL
Temperature:	30 °C
MS Conditions	
MS System:	Quattro Micro triple-quadrupole mass spectrometer (Micromass [®]) equipped with an electrospray ionization (ESI) source
Desolvation & Nebulizing Gas:	Nitrogen
Collision Gas:	Argon
Operating Mode:	MRM

The cone voltage and collision energy were optimized for each analyte by direct infusion of pure compound to the MS/MS compartment (Table 1).

The compounds were analyzed using two LC-MS/MS methods, one to analyze the negatively ionized compounds and another to analyze the positively ionized compounds (Table 1). It should be noted that the LC methods were not optimized to a great detail. Therefore, even better chromatograms can be expected in the future.

The LC method for the negatively ionized compounds was:

Time (min)	% of eluent A (5 mM NH ₄ OH)	% of eluent B (Acetonitrile)
0	95	5
1	95	5
12	40	60
13	95	5
25	95	5

Also 10 mM NH₄OH was tested but the peak shape was more symmetrical with the 5 mM solution. Good peak shapes was obtained also by using 10 mM ammonium acetate as the aqueous eluent. However, since the negative ionization of compounds is hampered at lower pH, sensitivity was reduced with this eluent. Peak shapes were acceptable for all the analysed compounds.

For the positively ionized compounds, the following LC method was used:

Time (min)	% of eluent A (0.5% Formic Acid)	% of eluent B (Acetonitrile)
0	95	5
1	95	5
14	30	70
15	95	5
25	95	5

Also 10 mM ammonium acetate was tested but the antibiotics could not be well resolved with that eluent. Peak shapes were acceptable for all the other compounds except for atenolol and sotalol that eluted early in the run. Peaks representing these compounds were wide and tailing.


Results and Discussion

Acidics st. 100 ng/mL


03-May-2007

08:57:44


MRM of 7 Channels ES-
360 > 273.9
8.31e5
Area

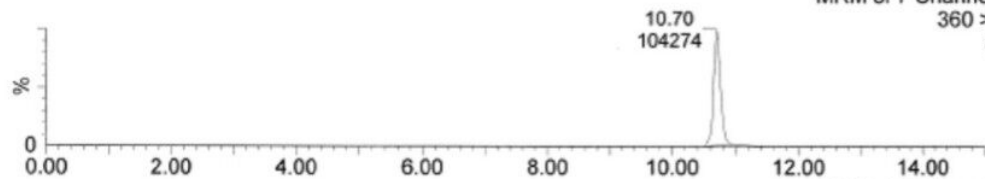


MRM of 7 Channels ES-
293.8 > 249.9
2.78e5
Area

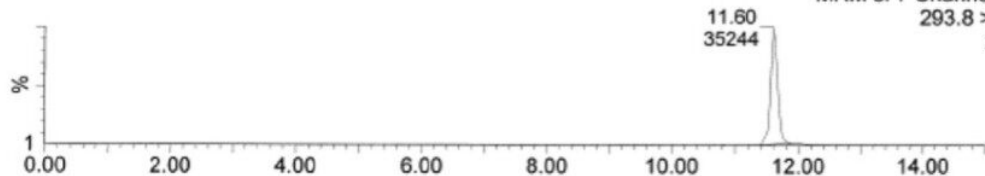


MRM of 7 Channels ES-
266.8 > 194.8
3.34e5
Area

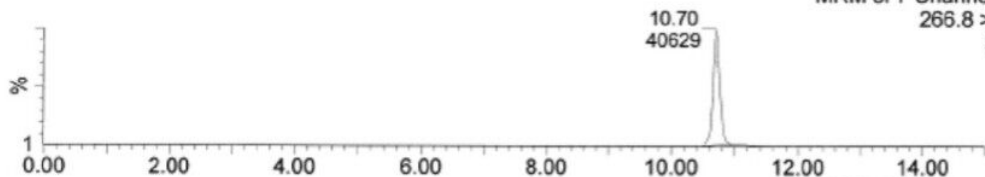


MRM of 7 Channels ES-
253 > 209
2.78e5
Area

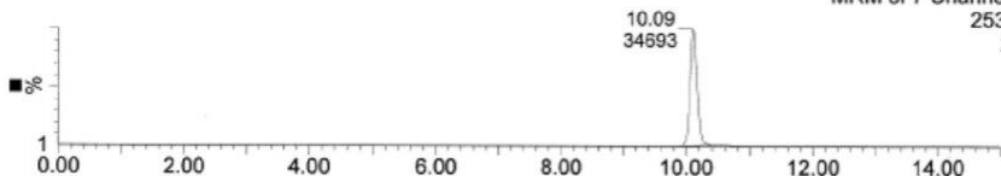


MRM of 7 Channels ES-
229 > 169.9
3.32e5
Area

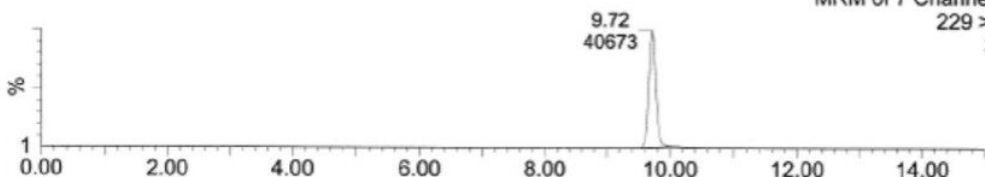

MRM of 7 Channels ES-
212.9 > 126.9
5.08e5
Area

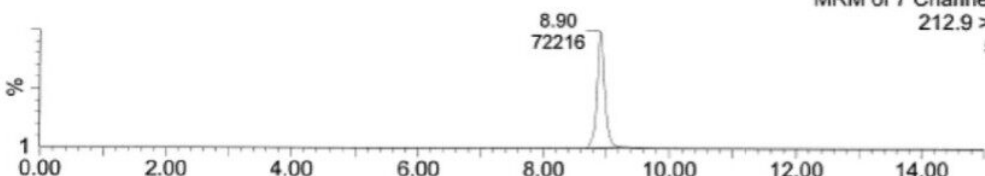

MRM of 7 Channels ES-
205.1 > 161
4.98e5
Area

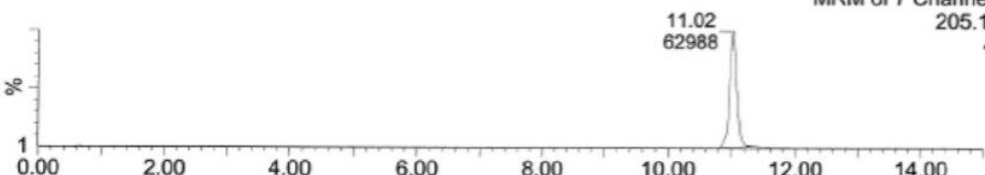


Standard - Negatively Ionized - 100 ng/mL

Turku puhdas 21.4.2004


03-May-2007

09:51:00


MRM of 7 Channels ES-
360 > 273.9
5.48e3
Area

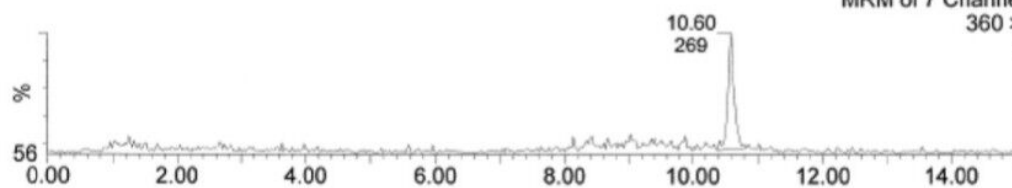


MRM of 7 Channels ES-
293.8 > 249.9
7.73e3

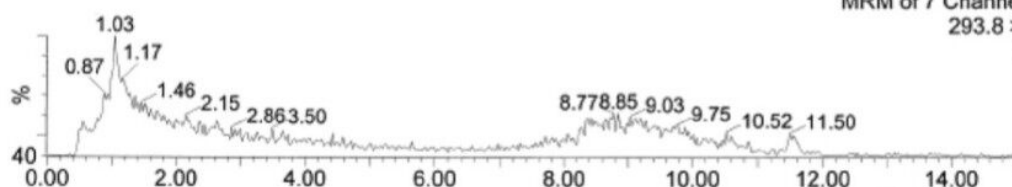


MRM of 7 Channels ES-
266.8 > 194.8
1.97e6
Area

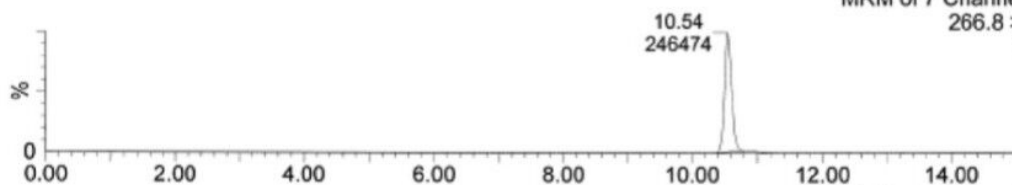


MRM of 7 Channels ES-
253 > 209
2.26e4
Area

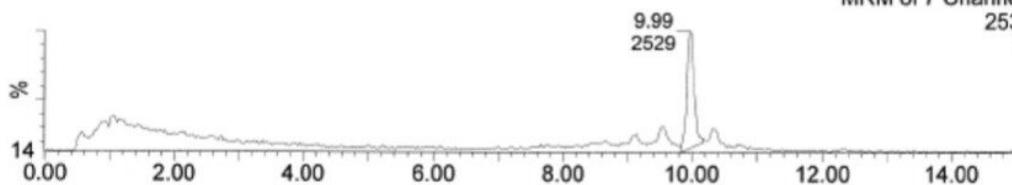


MRM of 7 Channels ES-
229 > 169.9
4.11e3

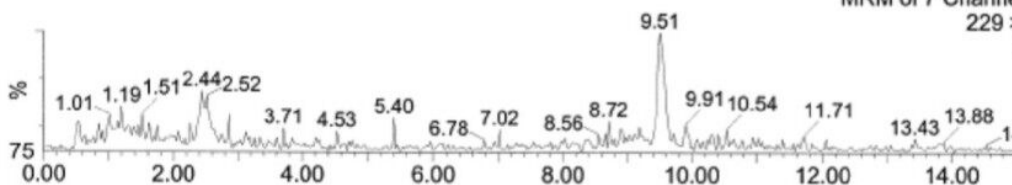

MRM of 7 Channels ES-
212.9 > 126.9
5.27e3
Area

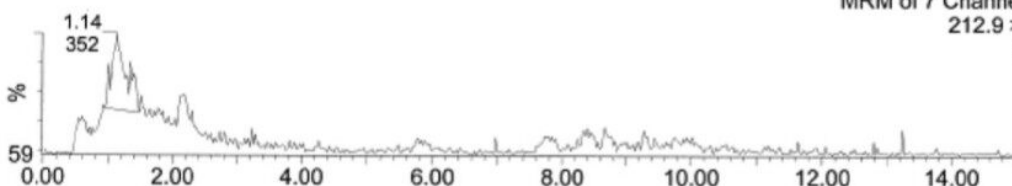

MRM of 7 Channels ES-
205.1 > 161
2.42e4
Area

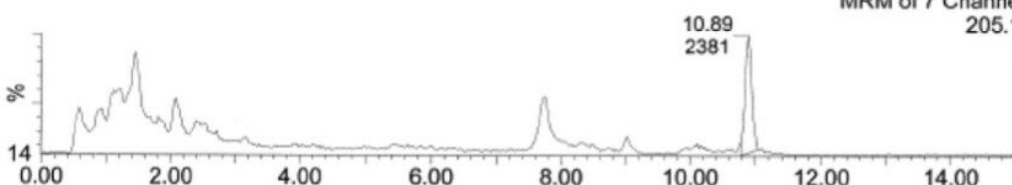


Drinking Water – Negatively Ionized – Concentration Factor 1000.

Aurajoki Halinen 16.3.2004

03-May-2007

11:01:04

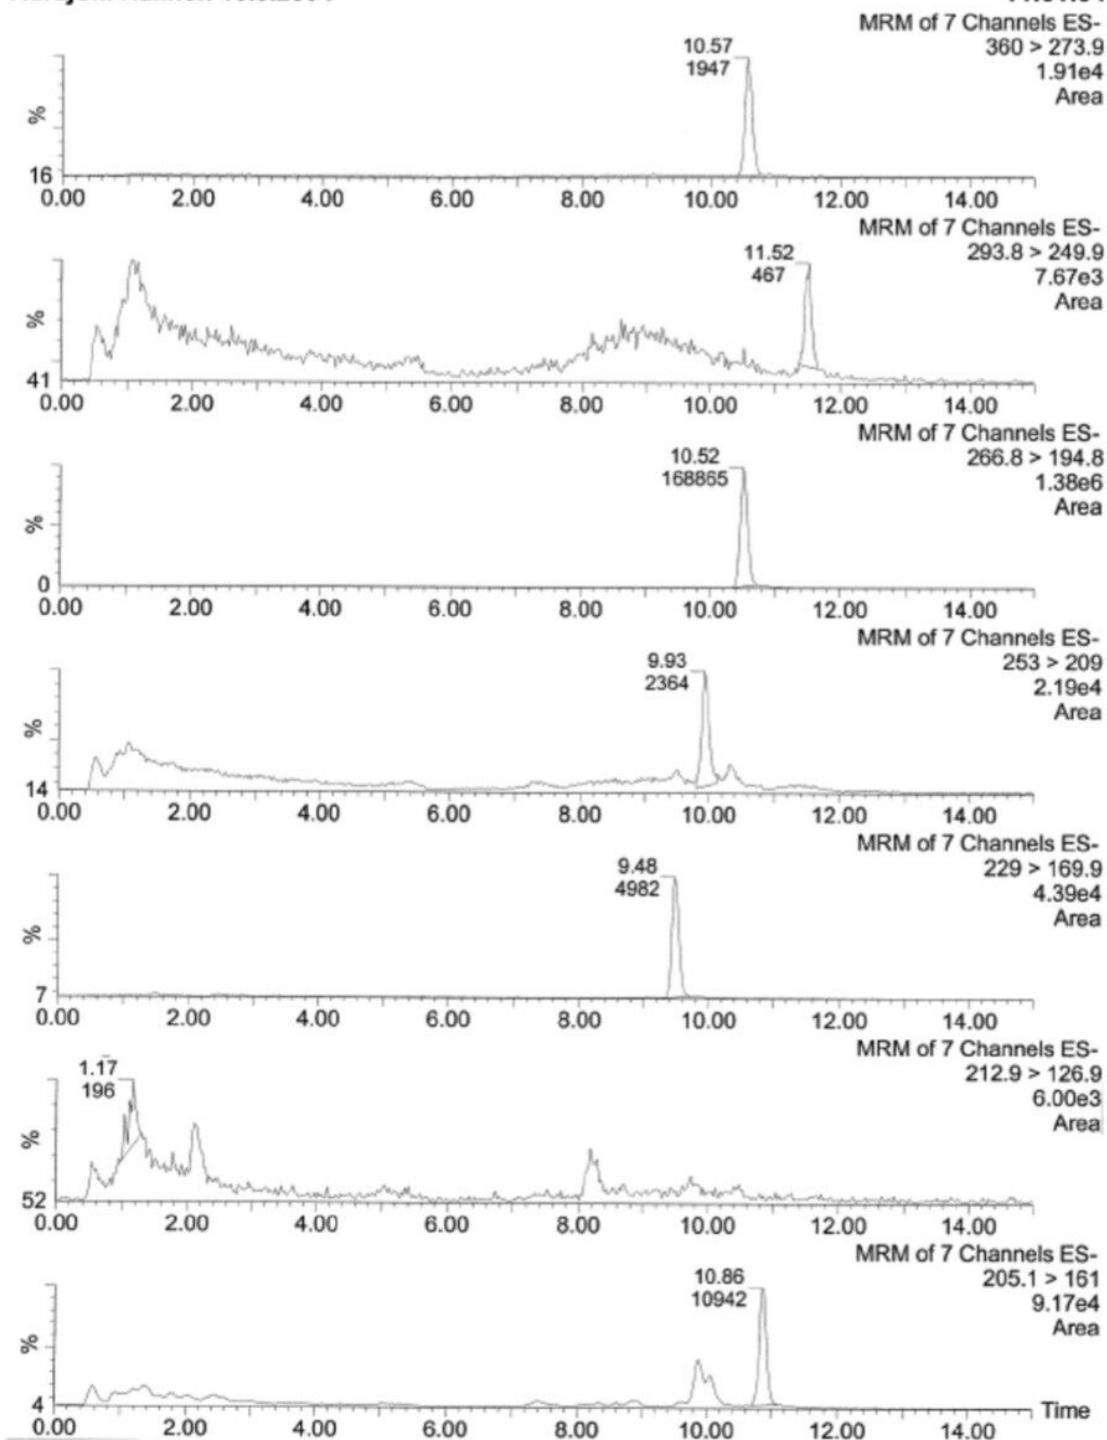


Surface Water – Negatively Ionized – Concentrated Factor 1000.

Aura JVP effluent 16.3.2004

03-May-2007

11:22:46

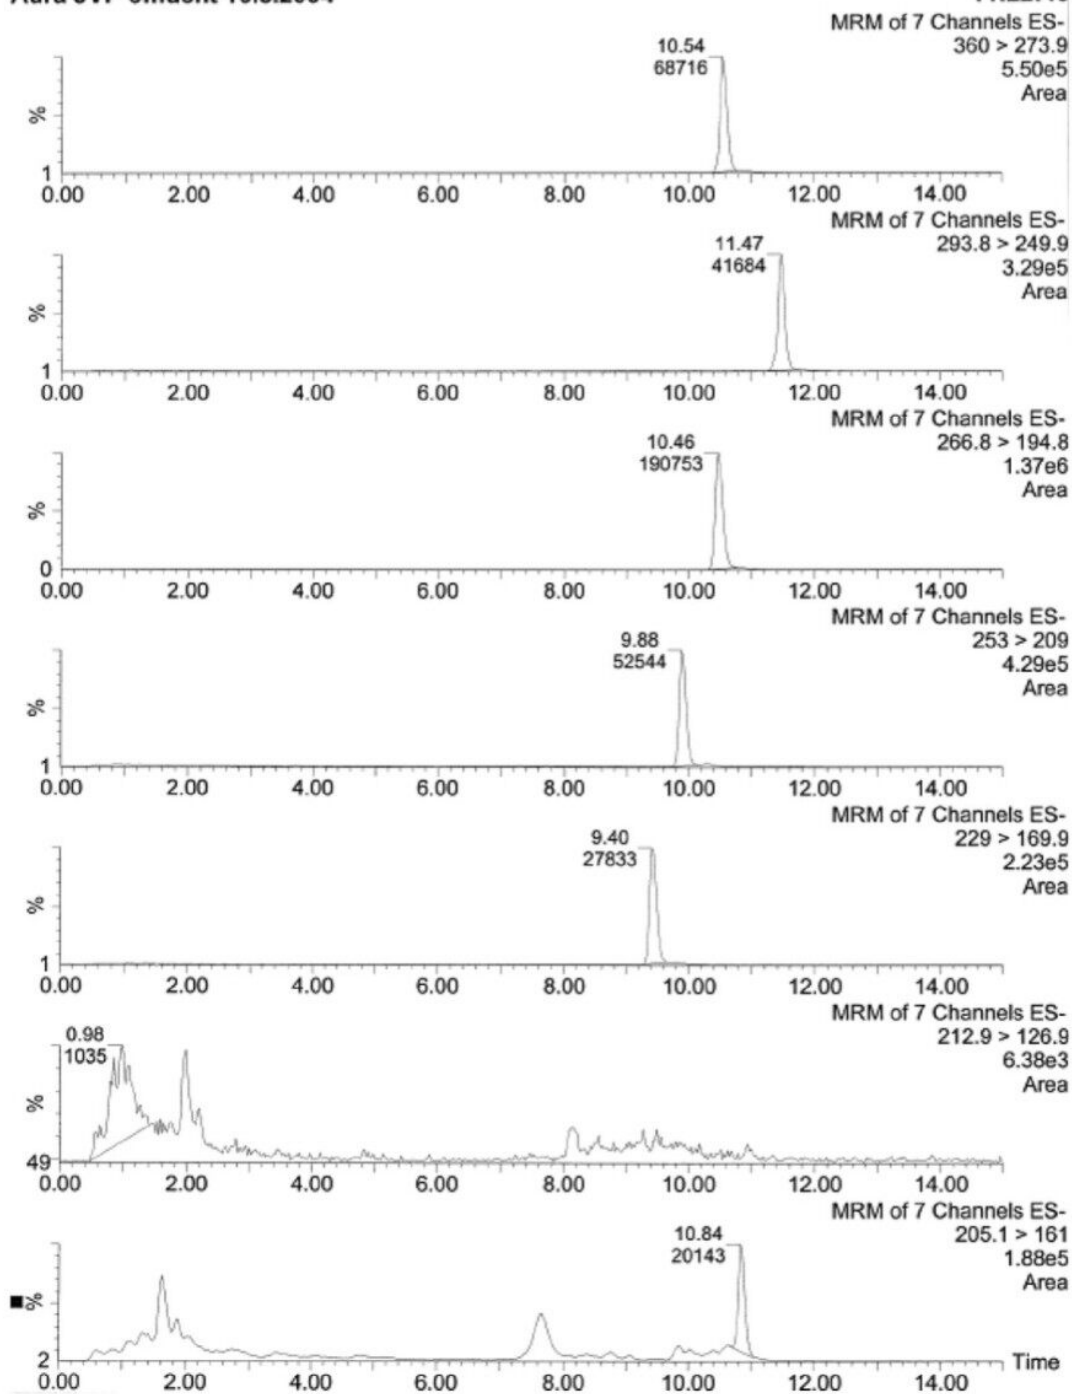


Sewage Treatment Plant Effluent – Negatively Ionized – Concentration Factor 500.

Aura JVP influent 16.3.2004


03-May-2007

11:49:24


MRM of 7 Channels ES-
360 > 273.9
8.92e5
Area

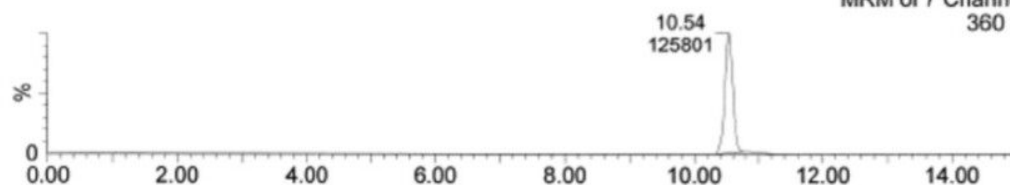


MRM of 7 Channels ES-
293.8 > 249.9
4.85e4
Area

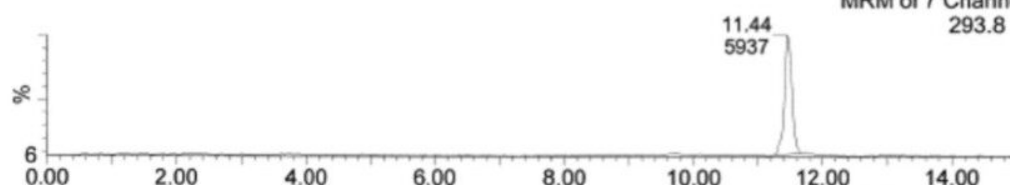


MRM of 7 Channels ES-
266.8 > 194.8
1.12e6
Area

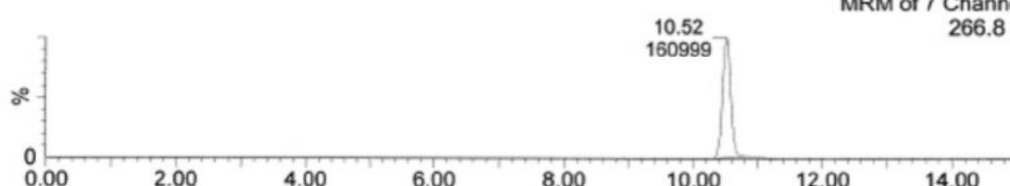


MRM of 7 Channels ES-
253 > 209
4.49e5
Area

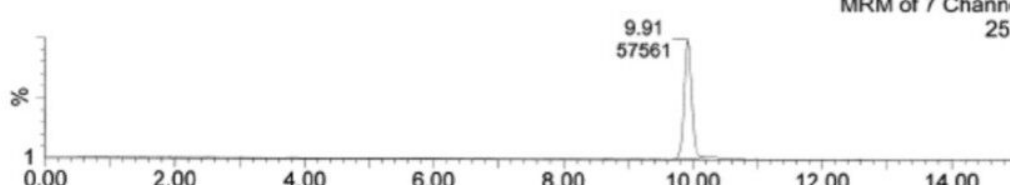


MRM of 7 Channels ES-
229 > 169.9
1.26e6
Area

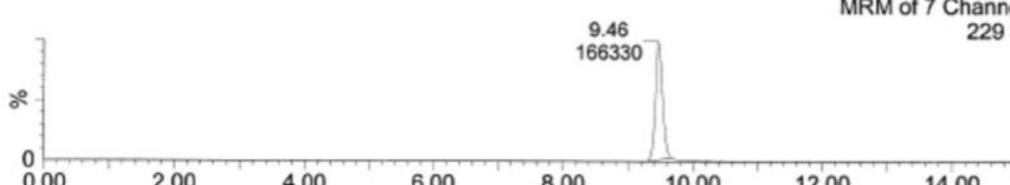

MRM of 7 Channels ES-
212.9 > 126.9
4.63e3

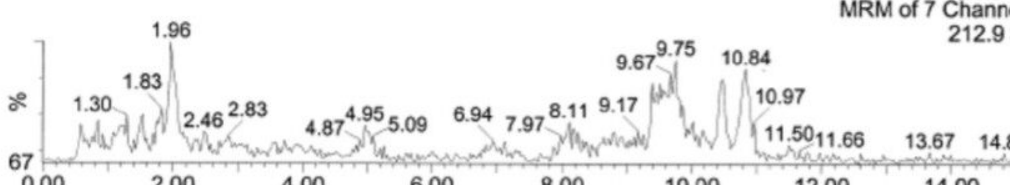

MRM of 7 Channels ES-
205.1 > 161
5.62e6
Area

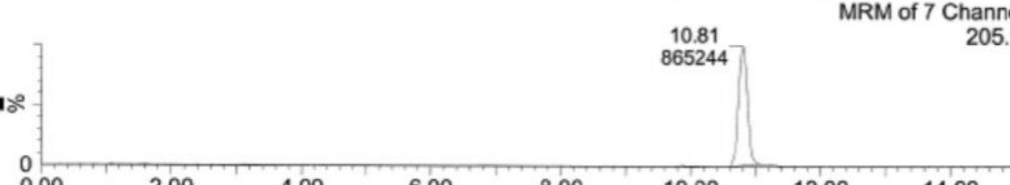


Sewage Treatment Plant Influent – Negatively Ionized – Concentration Factor 200.

28-May-2007

11:04:55

Basics 100 ng/mL

07052803

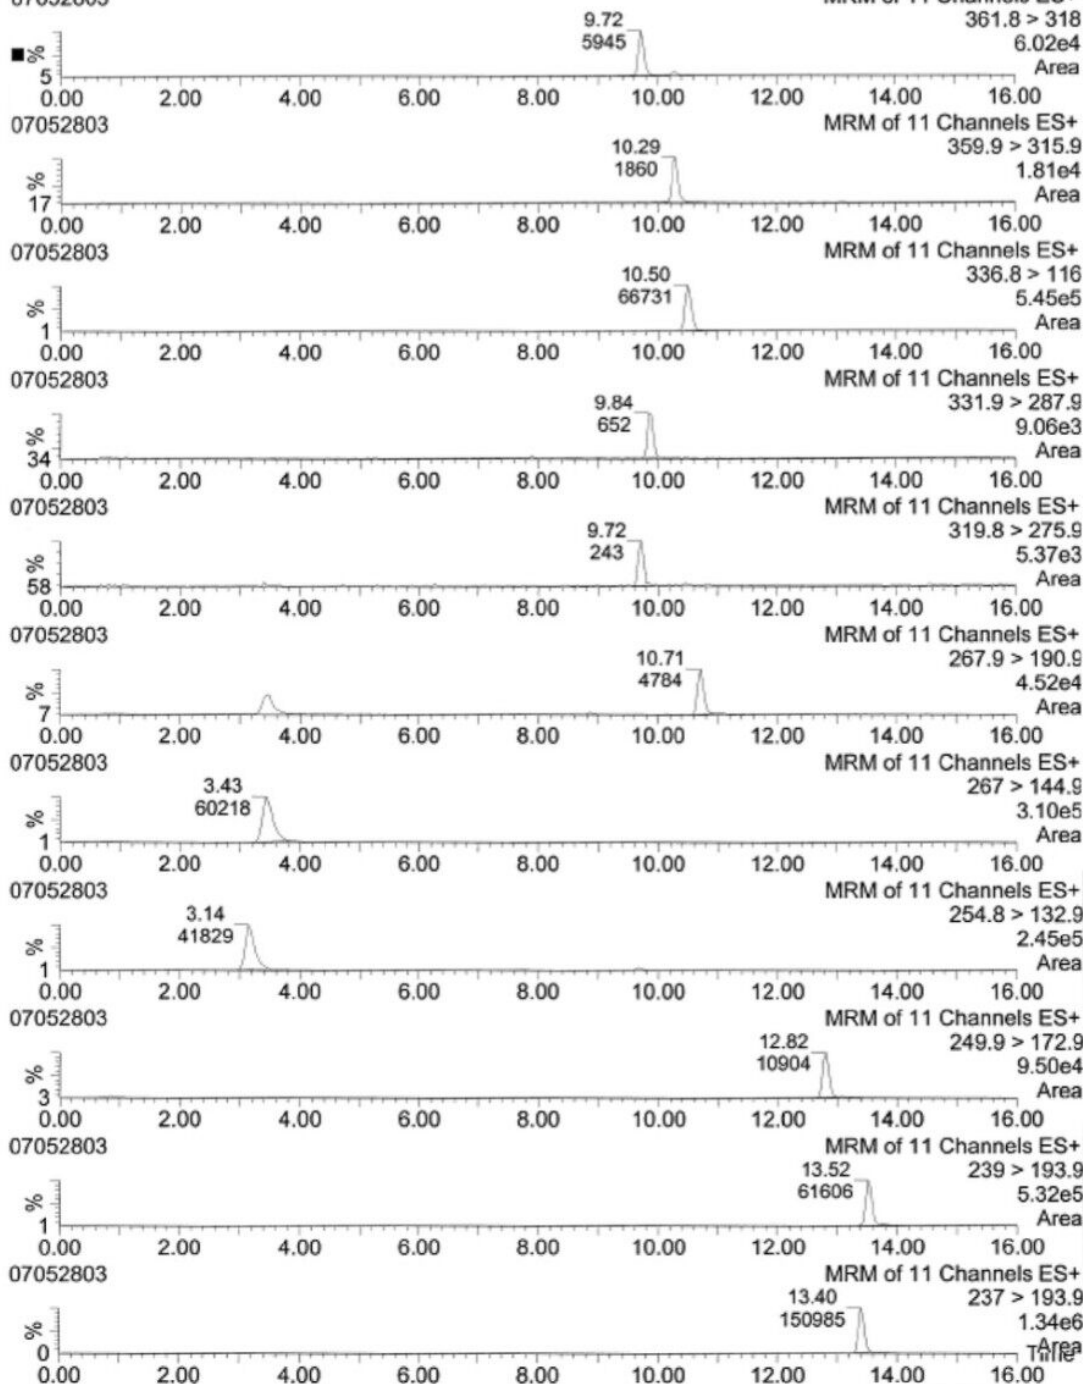

Standard - Positively Ionized - 100ng/mL

Vaasa Puhdas 3.5.04

28-May-2007

17:17:33


07052815

MRM of 11 Channels ES+

361.8 > 318

3.25e4

Area




07052815

MRM of 11 Channels ES+

359.9 > 315.9

7.77e4

Area




07052815

MRM of 11 Channels ES+

336.8 > 116

5.07e3

Area




07052815

MRM of 11 Channels ES+

331.9 > 287.9

3.77e3

Area




07052815

MRM of 11 Channels ES+

319.8 > 275.9

3.72e3

Area




07052815

MRM of 11 Channels ES+

267.9 > 190.9

4.38e3

Area




07052815

MRM of 11 Channels ES+

267 > 144.9

6.55e3

Area




07052815

MRM of 11 Channels ES+

254.8 > 132.9

4.30e3

Area




07052815

MRM of 11 Channels ES+

249.9 > 172.9

1.64e5

Area



07052815

MRM of 11 Channels ES+

239 > 193.9

1.79e6

Area




07052815

MRM of 11 Channels ES+


237 > 193.9

1.69e4

Area



Drinking Water – Positively Ionized – Concentration Factor 1000.

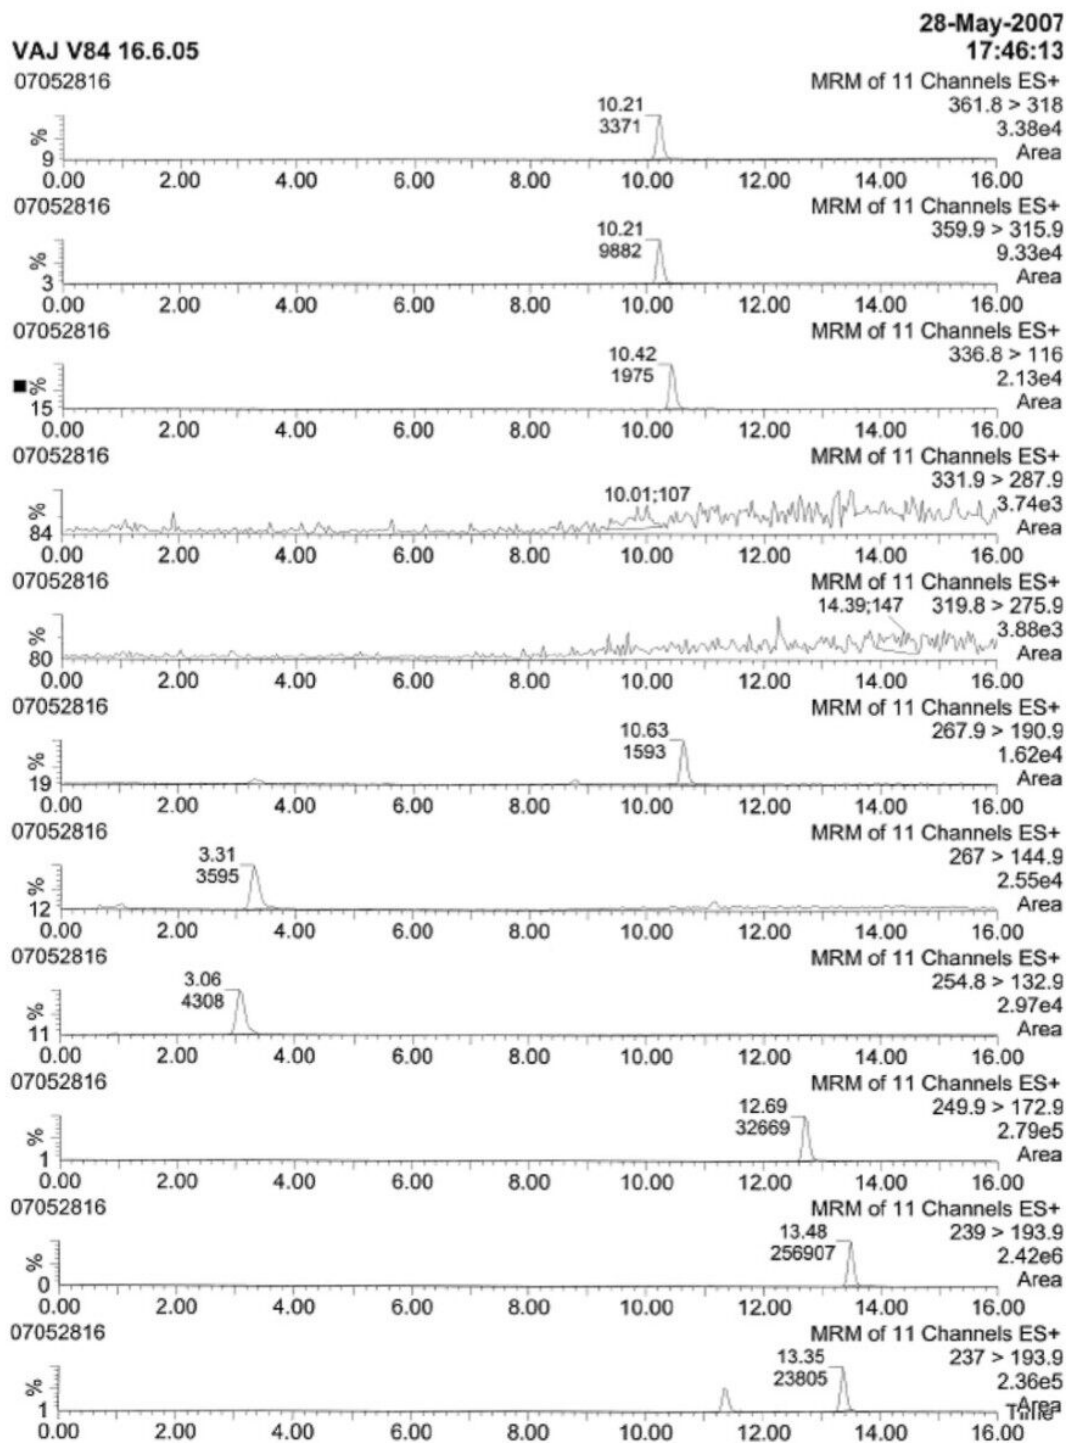


Surface Water – Positively Ionized – Concentration Factor.

Riihimäki lahteva 17.6.05


28-May-2007

18:14:50


07052817

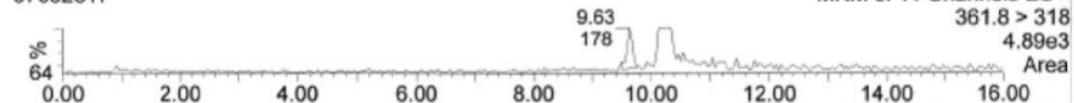


07052817

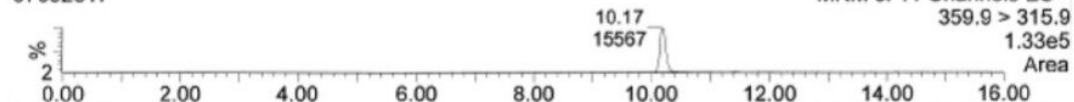


07052817

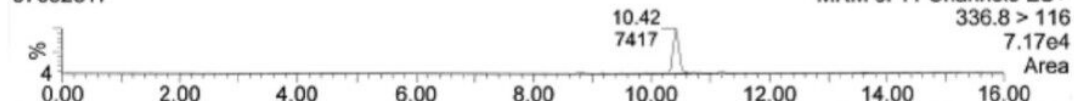


07052817

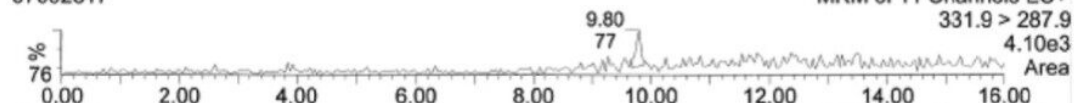


07052817

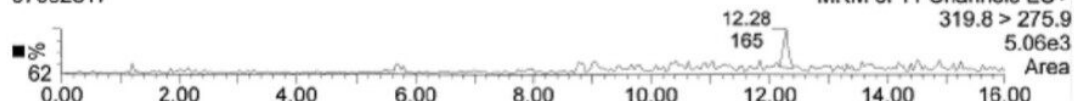


07052817

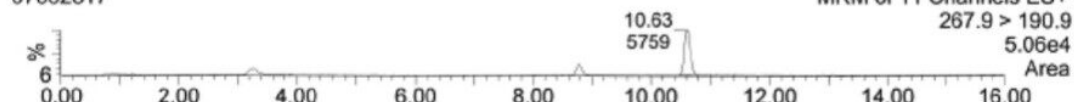


07052817

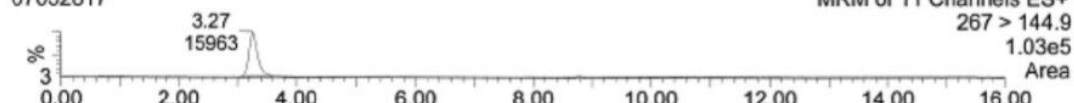


07052817

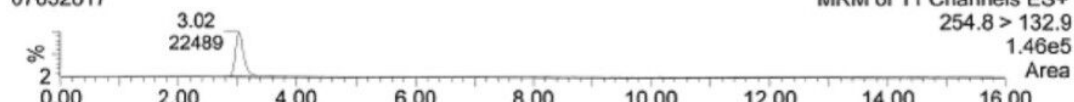


07052817

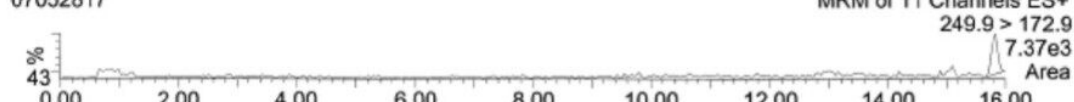


07052817

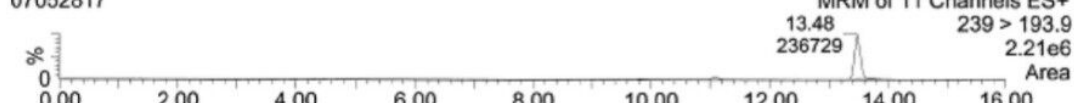

07052817

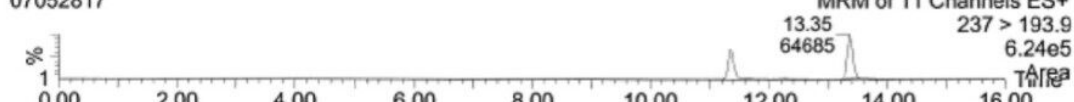

Sewage Treatment Plant Effluent – Positively Ionized – Concentration Factor 500.

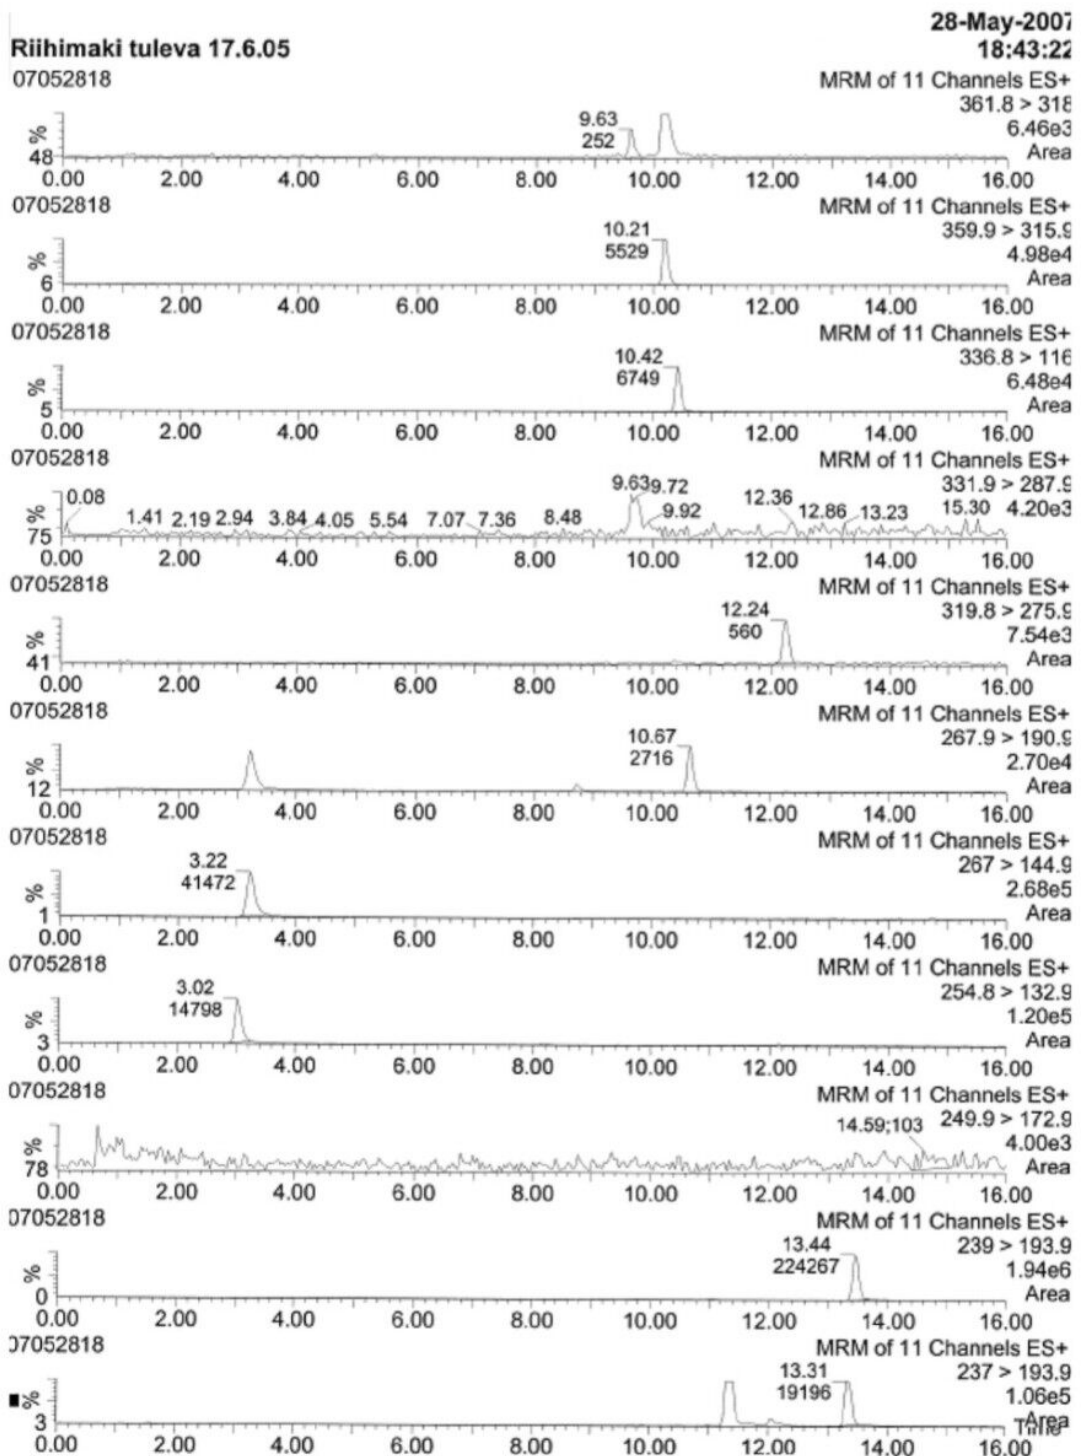

Sewage Treatment Plant Influent – Positively Ionized – Concentration Factor 200.

Conclusion

It was determined that the XBridge C₁₈ could detect the compounds in sewage, surface and drinking water samples. The peak shapes and sensitivity were good and the column was proven to be highly usable in the environmental analysis of pharmaceuticals.

Acknowledgement

Data for this report was provided courtesy of Abo Akademi University, Abo, Finland

Featured Products

WA60205, April 2008