

アプリケーションノート

ACQUITY UPLC Analysis of Organic Acids

日本ウォーターズ株式会社


This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief demonstrates the UPLC analysis of organic acids.

Introduction

Structures

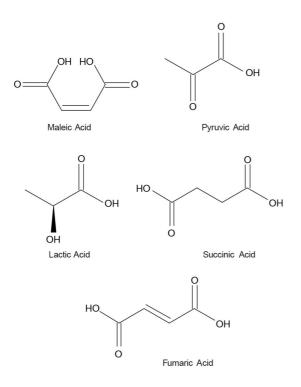

Experimental

UPLC Conditions

Column:	ACQUITY BEH Amide, 2.1 x 100 mm, 1.7 μm
Part Number:	186004801
Mobile phase A:	50/50 MeCN/H ₂ O with 10 mM CH ₃ COONH ₄ , pH 9.0
Mobile phase B:	95/5 MeCN/H ₂ O with 10 mM CH ₃ COONH ₄ , pH 9.0
Gradient Flow Rate:	0.6 mL/min
Injection Volume:	5.0 μL

Column Temp:	50 °C
Sample Temp:	5 °C
Strong/Weak needle wash:	95/5 MeCN/H ₂ O
Seal wash:	10/90 MeOH/H ₂ O
Instrument:	ACQUITY UPLC and TQD

Gradient:


Time	%A	%B
(min)		
Initial	0.1	99.9
0.4	0.1	99.9
0.5	40.0	60.0
2.0	70.0	30.0
2.01	0.1	99.9
5.0	0.1	00.0
5.0	0.1	99.9

MS Conditions

Instrument:	ACQUITY TQD
Ionization Mode:	ES⁻
Capillary Voltage:	4.0 kV
Cone Voltage:	-25 V

Collision Energy:	10 eV
Extractor:	3 V
RF Lens:	0.1 V
Source Temp:	130 °C
Desolvation Temp:	350 °C
Desolvation Gas:	650 L/hr
Cone Gas:	0 L/hr
Collision Gas:	0.1 mL/min
MRM condition:	Pyruvic acid: 86.92 > 42.9
	Lactic acid: 88.92 > 42.9
	Succinic acid: 116.93 > 72.9
	Maleic and Fumaric acid: 114.88 > 70.9

Results and Discussion

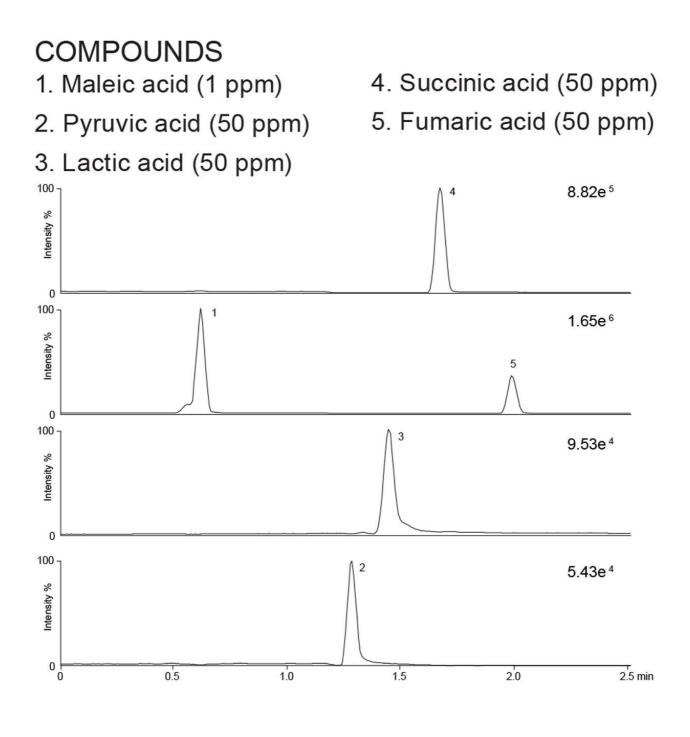

Featured Products

ACQUITY UPLC System < https://www.waters.com/514207>

Xevo TQD Triple Quadrupole Mass Spectrometry https://www.waters.com/134608730

WA60096, June 2009

©2019 Waters Corporation. All Rights Reserved.