Waters™

Application Note

Chemical Stability Study of ACQUITY UPLC BEH Amide Columns



This is an Application Brief and does not contain a detailed Experimental section.

Abstract

This application brief highlights the Chemical stability study of ACQUITY UPLC BEH Amide Columns.

Introduction

Structures

Experimental

Test Conditions

Columns:	ACQUITY UPLC BEH Amide, 2.1 x 50 mm, 1.7 µm	
Part Number:	186004800	
Mobile Phase A:	50/50 MeCN/H ₂ O with 10 mM CH ₃ COONH ₄ , pH 5.5	
Mobile Phase B:	95/5 MeCN/H ₂ O with 10 mM CH ₃ COONH ₄ , pH 5.5	
Flow Rate:	0.5 mL/min	
Injection Volume:	2.0 µL (full loop injection mode)	
Sample Concentration:	25 μg/mL each	
Sample Diluent:	75/25 MeCN/MeOH	
Column Temperature:	30 °C	
Weak Needle Wash:	95/5 MeCN/H ₂ O	
Detection:	UV @ 254 nm	
Sampling Rate:	40 pts/sec	
Filter Time Constant:	0.1	
Instrument:	Waters ACQUITY UPLC with ACQUITY UPLC PDA	

Detector


Gradient

Time (min)	Profile		
	%A	%B	
Initial	1	99	
2.00	99	1	
2.10	1	99	
2.50	1	99	

Results and Discussion

The compounds used in this study are:

- 1. Uracil
- 2. 5-fluorocytosine
- 3. Cytosine

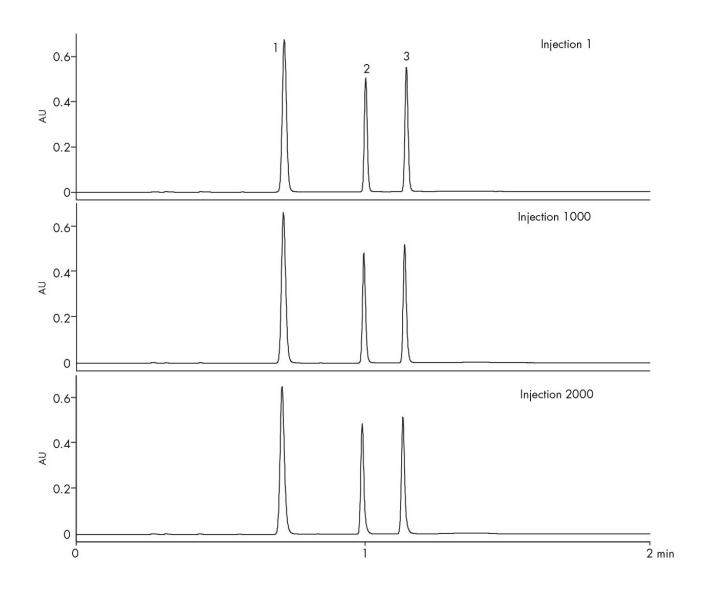

Featured Products

ACQUITY UPLC PDA Detector https://www.waters.com/514225

WA60106, June 2009

© 2022 Waters Corporation. All Rights Reserved.	